


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [2004850420](#)  
**Status:** **Active**  
**Overview:** [Easy-On FFC FPC Connectors](#)  
**Description:** Easy-On FFC/FPC One-Touch Connector, 0.50mm Pitch, Right-Angle, Bottom Contact, 4.46mm Height, 105°C Operating Temperature, 20 Circuits, Gold (Au) Plating

**Documents:**

|   |  |
|---|--|
| <a href="#">3D Model</a>                                      | <a href="#">Packaging Specification 2004859200-SPK-200 (PDF)</a> |
| <a href="#">Drawing (PDF)</a>                                 | <a href="#">Datasheet (PDF)</a>                                  |
| <a href="#">3D Model (PDF)</a>                                | <a href="#">RoHS Certificate of Compliance (PDF)</a>             |
| <a href="#">Product Specification 2004851400-PS-000 (PDF)</a> |  |

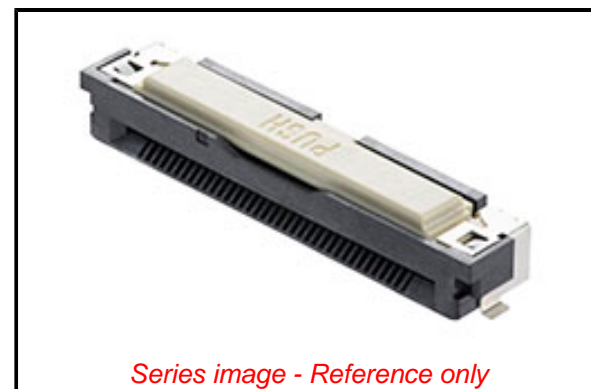

**General**

|                |  |
|----------------|--|
| Product Family | FFC/FPC Connectors                         |
| Series         | <a href="#">200485</a>                     |
| Overview       | <a href="#">Easy-On FFC FPC Connectors</a> |
| Product Name   | Easy-On                                    |
| UPC            | 191130074372                               |

**Physical**

|                                |                        |
|--------------------------------|------------------------|
| Actuator Type                  | One-Touch              |
| Circuits (Loaded)              | 20                     |
| Circuits (maximum)             | 20                     |
| Color - Resin                  | Black                  |
| Contact Position               | Bottom                 |
| Durability (mating cycles max) | 20                     |
| Mated Height                   | 4.46mm                 |
| Material - Metal               | Copper Alloy           |
| Material - Plating Mating      | Gold                   |
| Material - Resin               | Liquid Crystal Polymer |
| Net Weight                     | 504.517/mg             |
| Number of Rows                 | 1                      |
| Orientation                    | Right Angle            |
| PCB Mounting                   | Surface Mount          |
| PCB Retention                  | Yes                    |
| Packaging Type                 | Embossed Tape on Reel  |
| Pitch - Mating Interface       | 0.50mm                 |
| Polarized to PCB               | Yes                    |
| Stackable                      | No                     |
| Temperature Range - Operating  | -40° to +105°C         |
| Wire/Cable Type                | FFC/FPC                |

**Electrical**

|                               |      |
|-------------------------------|------|
| Current - Maximum per Contact | 0.5A |
| Voltage - Maximum             | 50V  |

**Material Info**

**Reference - Drawing Numbers**

|                         |                                |
|-------------------------|--------------------------------|
| Packaging Specification | 2004859200-SPK-200             |
| Product Specification   | 2004851400-PS-000              |
| Sales Drawing           | 2004850400-000, 2004851400-000 |

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[200485 Series](#)

**Mates With**

Premo-Flex FFC Cable [15016](#)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[200485-0420](#)