

F9 Flash Memory Controller

F9

hyperston® 

F9

Flash Memory Controller

The Hyperstone F9 family of Flash Memory Controllers together with provided application and Flash specific firmware offers an easy-to-use turnkey platform for industrial, high-endurance CompactFlash cards or memory modules compatible to host systems with CompactFlash™, IDE or PATA interfaces.

- Designed to fully satisfy industrial reliability, endurance, and feature requirements
- **hyReliability™** Flash Management including superior wear leveling, read disturb management, and power fail management ensuring highest reliability and durability
- **hyMap®** Flash Translation Layer (FTL) offering second to none random write performance, minimal write amplification, and consequently highest endurance for random access heavy usage profiles
- Flexible 96-Bit/1K BCH ECC engine supporting all Flash Memory requirements
- Optimized 32-Bit RISC core, extended instruction set for Flash Memory handling
- Continuously updated Flash Memory chip support and long term availability
- High performance on-the-fly AES 128 and 256 encryption engine
- Custom features can be implemented with simple firmware upgrades
- Turnkey solution including firmware, manufacturing kit, test and development hardware, as well as reference schematics
- 16 GPIOs for customer specific applications supporting SPI, I²C and ISO7816 or additional flash CE
- Application Programming Interface (API) and Software Development Kit (SDK) to develop own Custom Firmware Extensions (CFE)

Targeted Applications

- High reliability & industrial Compact Flash™ Cards (CFC)
- IDE Disk-on-Module (DoM)
- Multi-Chip-Package (MCP)
- PCMCIA or ATA PC cards
- Embedded Flash – Disk-on-Board


Order Information

- F9-ILAT06 --- TQFP-128, 14x14x1.0mm, 8 CEs, RoHS, -40 to +85 °C
- F9-RAB07 --- TFBGA-144, 10.4x10.4x1.1mm, 16 CEs, 7816 UART, API, RoHS, -40 to +85 °C
- F9-RAB06 --- TFBGA-124, 9 x 9 x 1.2 mm, 8 CEs, RoHS, -40 to +85 °C
- F9-0ABD0 --- Tested Die / Wafer

Compliance & Performance

- Fully compliant with CompactFlash™ 4.1, 5.0 and compatible to 6.1 specifications
- Sequential read up to 120 MB/s
- Sequential write up to 120 MB/s
- Secure Erase and Sanitize support
- S.M.A.R.T. and health monitoring
- -40 to +85 °C industrial grade version

F9 Block Diagram

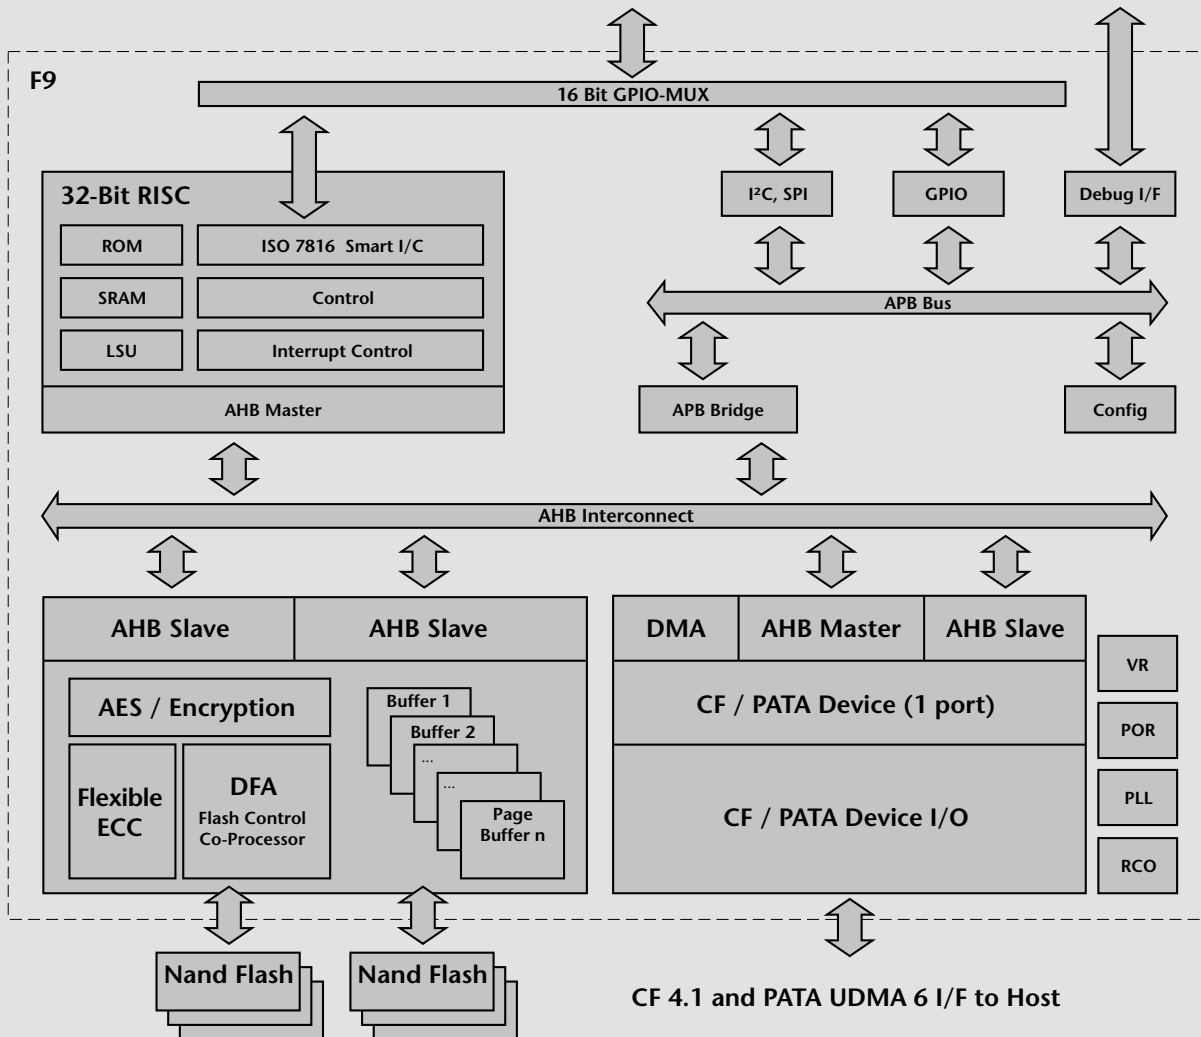

Controller & CPU

- High performance 32-Bit Hyperstone RISC microprocessor
- Large internal RAM provides firmware flexibility
- Multiplexed GPIO options include up to 16 and 12 GPIOs - SPI, I²C, 8x CE or ISO7816 - for Die and F9-RAB07, respectively
- Interface logic to connect an NTC thermistor as a temperature sensor
- Unique ID for security applications
- AES-128 and AES-256 support with CBC and XTS modes, high performance on-the-fly encryption/decryption
- Hardware RNG
- Flexible clock frequency generation through internal oscillator and PLL
- Automatic power-down mode during wait periods for host data or Flash Memory operation completion, automatic sleep mode during host inactivity periods
- On-chip switching voltage regulator for 1.2V controller core power
- Supply voltage 3.3V ± 5%
- Application Programming Interface (API) and Software Development Kit (SDK)

Host Interface & Compliance


- PC-Card 8.0 (PC-Card ATA), CF 6.1 standard compatible
- ATA-7 standard compatible in True-IDE mode
- Fast ATA host-to-buffer transfer rates supporting PIO mode 6, MDMA mode 4, UDMA mode 6 in True-IDE mode
- 5V tolerant host interface I/O
- Compatible to PCMCIA specification version 2.1
- Automatic sensing of PC-Card or True-IDE host interface mode
- Configurable as removable and fixed drive
- S.M.A.R.T., Sanitize, and Secure Erase support
- Configurable Early-Acknowledge to avoid any data loss during power fail support is possible

Flash Memory Interface

- Direct Flash Memory Access (DFA) co-processor incl. page buffers and interleaving capability
- DDR interface compliant with Toggle DDR and ONFI 2.3, compatible with all DDR Flash Memory devices
- Asynchronous SDR interface, ONFI 1.0 compliant, compatible with all legacy interface Flashes
- 2-Channels with data transfer rate to Flash up to 200 MB/s each
- Flexible 96-Bit/1K BCH ECC engine supporting all Flashes
- CRC for additional reliability
- Direct connection of up to 8 Flash Memory chip enables (CE) additional 8 CE multiplexed with GPIO
- Flash Memory power down logic and write protect control
- Supporting all Flash technologies including 3D Nand and pSLC modes
- On-chip voltage regulator for 1.8V Flash Memory I/O power

Flash Memory Management

- hyReliability™ Flash Memory Management optimizing reliability, power fail safety, endurance, data retention, and performance
- hyMap® Flash Translation Layer offering second to none random write performance, minimal write amplification, and consequently highest endurance for random access heavy usage profiles (e.g. JEDEC Enterprise)
- Optimized for fast boot-up times
- Bad Block Management
- Static, Dynamic and Global Wear leveling to maximize system write endurance
- Intelligent garbage collection
- Read Disturb Management and Dynamic Data Refresh to maximize data retention
- Management of sudden power-fails
- Interleaving, cache, and multi-plane programming
- Firmware is stored redundantly for recovery and refresh
- In-Field Firmware update without user data loss
- Secure erase, fast erase and secure TRIM
- Health-Monitoring and S.M.A.R.T. support
- Customized firmware, optimizations and feature implementations possible upon request.

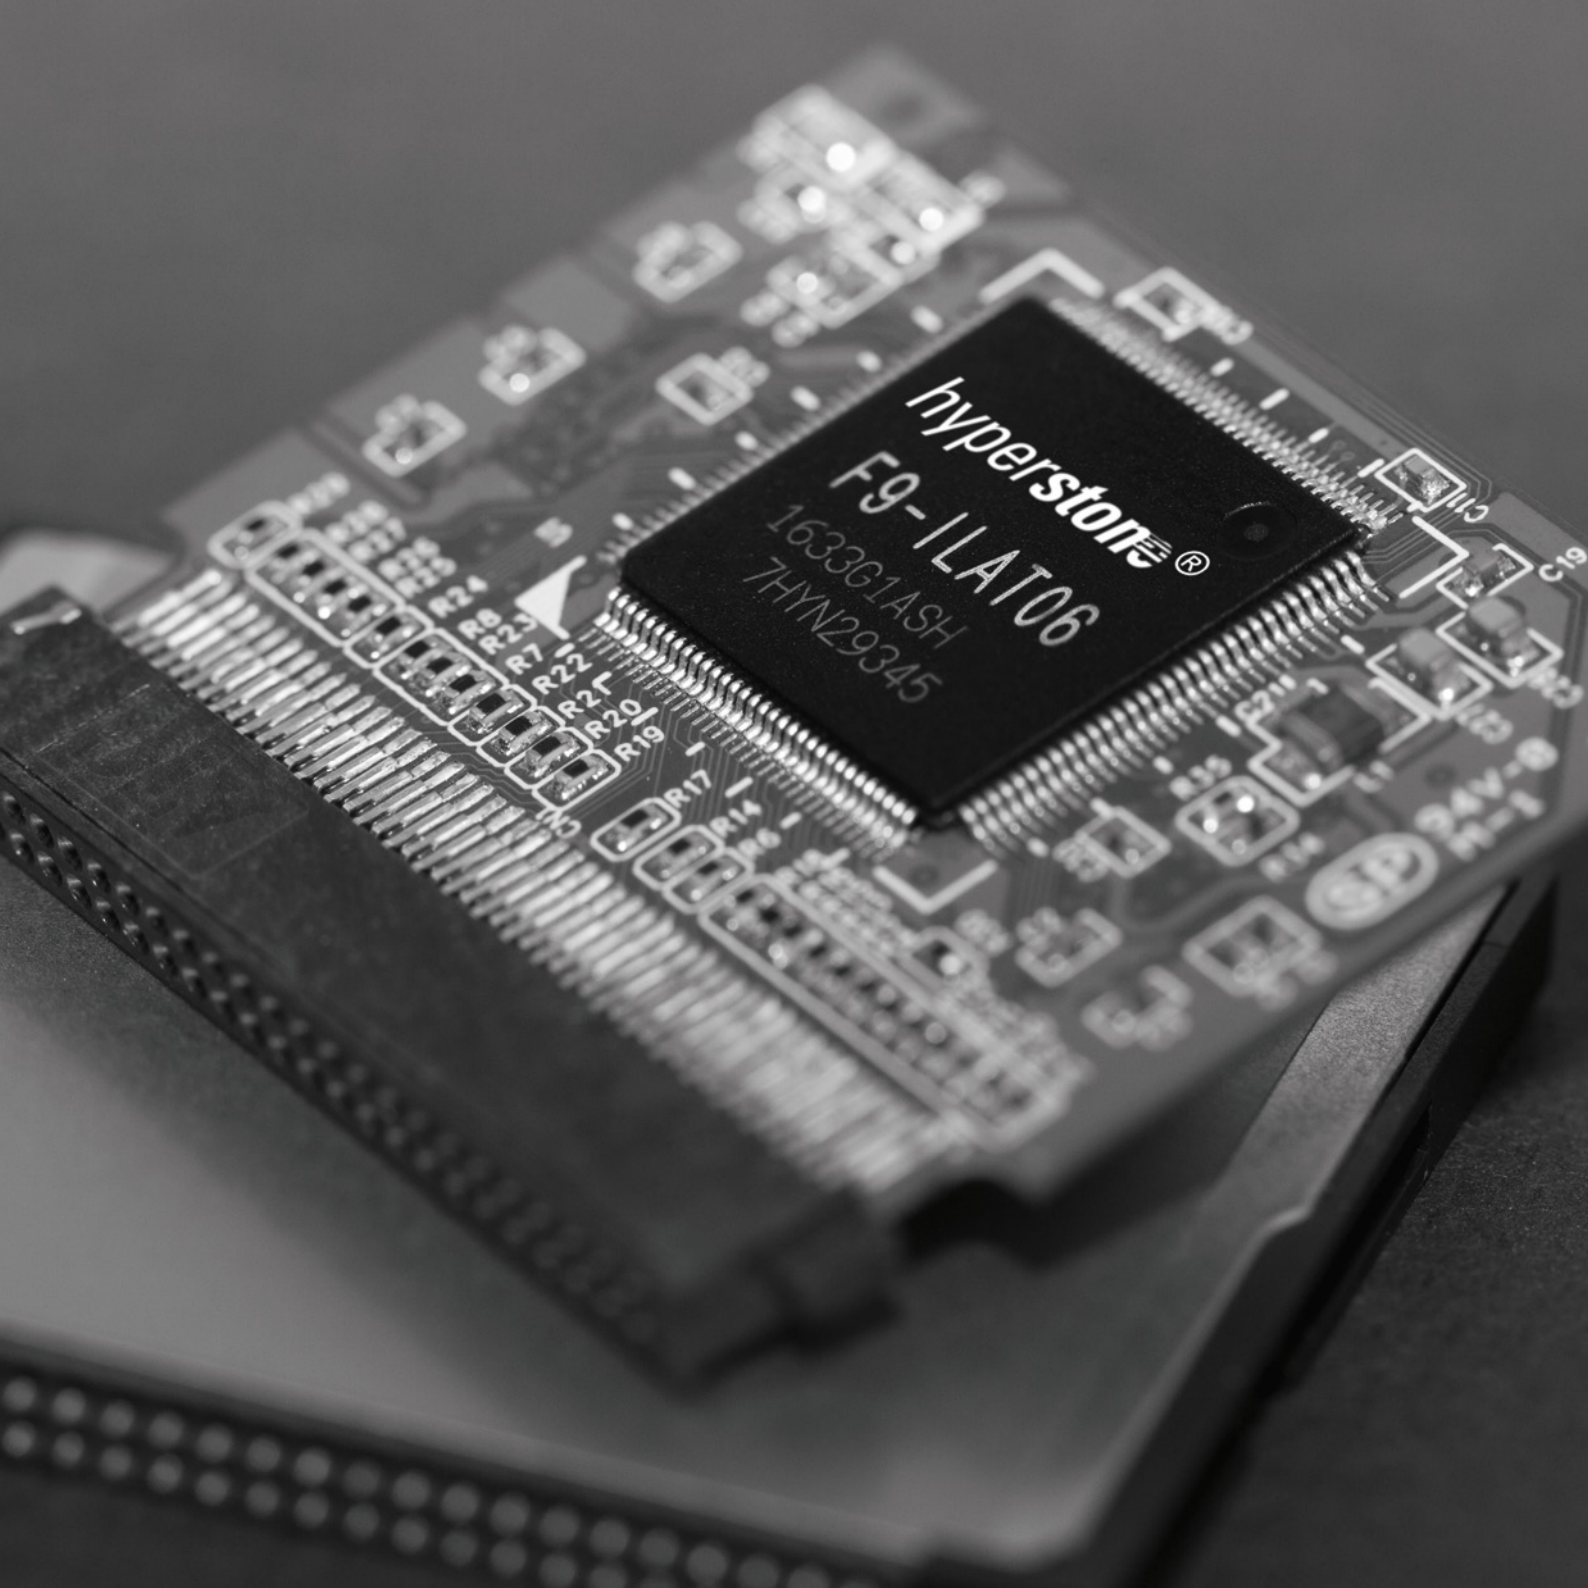

hyperstone®

F9-1LAT06

1633G1ASH
7HYN29345

R7
R22
R20
R19
R17
R23
R24

C19



Hyperstone GmbH

Line-Eid-Strasse 3
78467 Konstanz
Germany

Phone: +49 7531 9803 0

Email: eu.sales@hyperstone.com

Hyperstone Inc. - USA

486 N Patterson Drive Suite 301
Winston-Salem, NC 27101
USA

Phone: +1 336 744 0724

Email: us.sales@hyperstone.com

Hyperstone Asia Pacific - Taiwan

3F., No. 501, Sec.2, Tiding Blvd.
Neihu District, Taipei City 114
Taiwan, R.O.C.

Phone: +886 2 8751 0203

Email: ap.sales@hyperstone.com

www.hyperstone.com

Content is subject to change without prior notice. F9, hyReliability and hyMap are trademarks of Hyperstone GmbH. Other brand, product, or company names are property of the respective holder. Warranties, implied or expressed as well as liabilities for any damage resulting from using provided information in this document are excluded until part of a separate written contract.

HS-Mkt-SH-17-01-13

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hyperstone:](#)

[F9-ILAT06](#) [F9-RAB06](#)